


Panel Radiators

Heat Merchants

Test Pressure 13 bar	Max. Operation Pressure 10 bar	Max. Water Temperature 110 °C	Warranty 10 years	Number of Connection 4xDIN 6xDIN
--------------------------------	------------------------------------------	-----------------------------------------	-----------------------------	------------------------------------------------

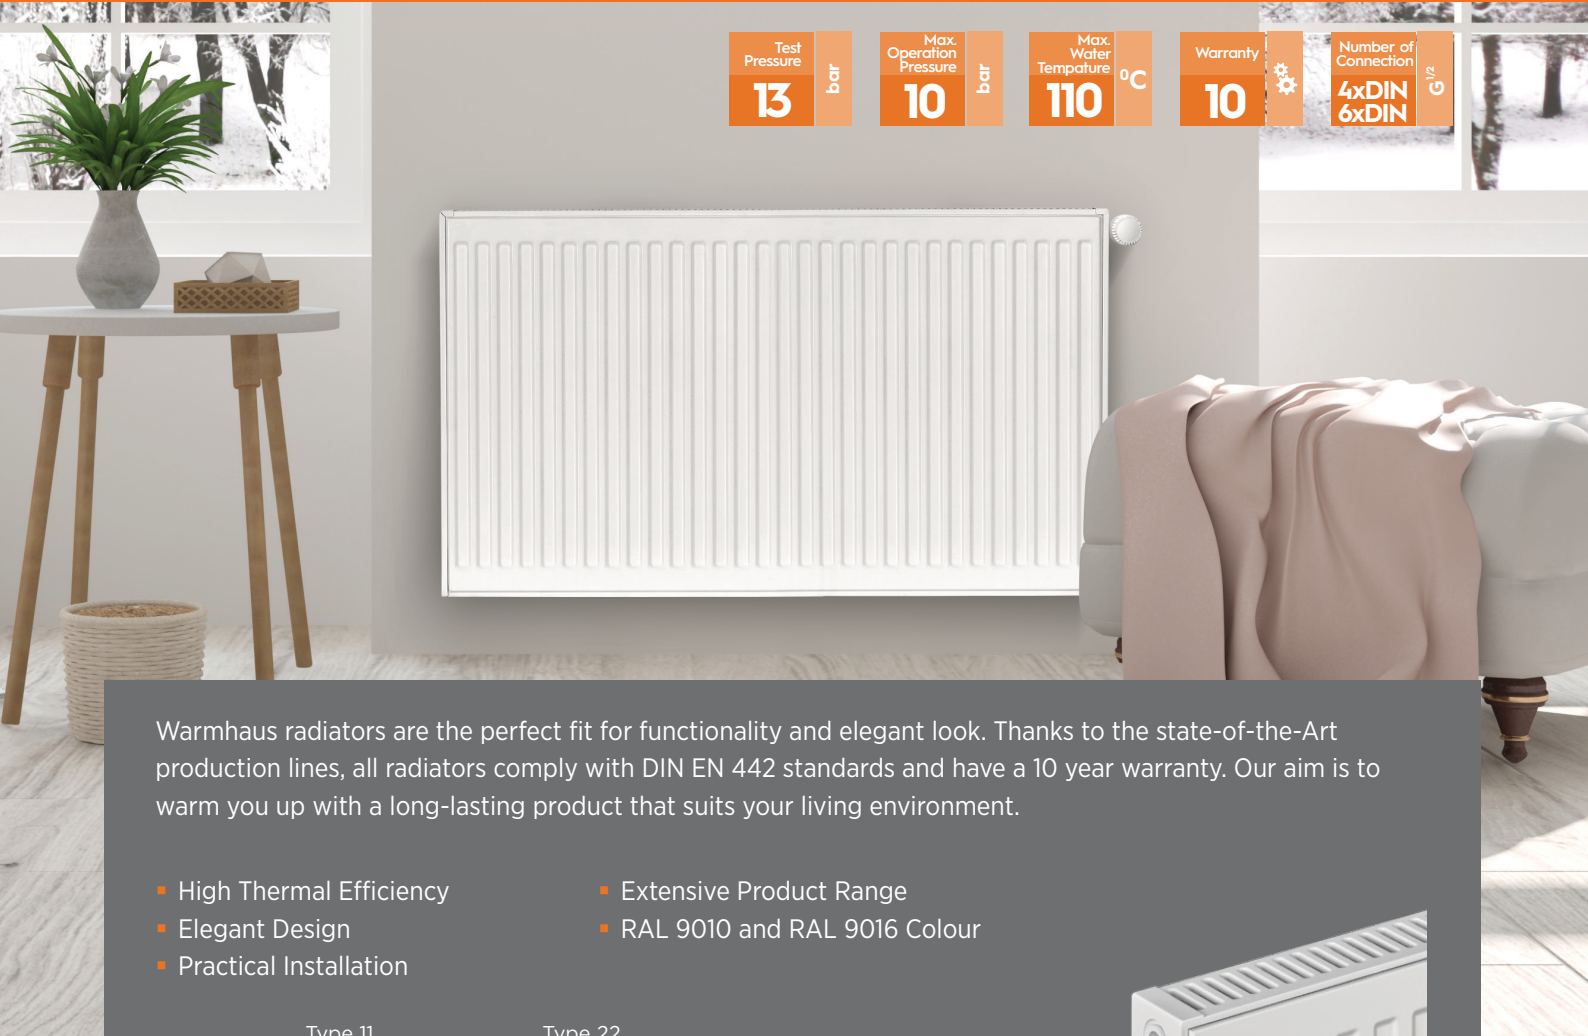

Warmhaus radiators are the perfect fit for functionality and elegant look. Thanks to the state-of-the-Art production lines, all radiators comply with DIN EN 442 standards and have a 10 year warranty. Our aim is to warm you up with a long-lasting product that suits your living environment.

- High Thermal Efficiency
- Elegant Design
- Practical Installation
- Extensive Product Range
- RAL 9010 and RAL 9016 Colour



	Type 11	Type 22
Width (mm)	50	105
Height (mm)	500	300-500-600
Length (mm)	400-2000	400-2000

All radiators are protected by shrink bubble wrap, plastic corner protectors and side covers



Warmhaus is one of the 10 biggest radiator producers in the world. Advanced production facilities mean they can deliver high quality radiators to 35 different countries around the world.



Standard Steel Panel Radiators

LENGTH	HM CODE	Heat Output Watt	Heat Output Watt
		(75-65-20)	(45-35-20)
TYPE 11	500mm Height Single		
400	U28159	311	97
500	U28160	389	122
600	U28161	466	146
700	U28162	544	170
800	U28163	622	195
900	U28164	699	219
1000	U28165	777	244
1100	U28166	855	268
1200	U28167	932	292
1300	U28168	1010	317
1400	U28169	1088	341
1500	U28170	1166	365
1600	U28171	1243	390
1800	U28172	1399	438
2000	U28173	1554	487

LENGTH	HM CODE	Heat Output Watt	Heat Output Watt
		(75-65-20)	(45-35-20)
TYPE 22	500mm Height Double		
400	U27886	590	180
500	U27887	737	225
600	U27888	884	270
700	U27889	1032	315
800	U27890	1179	360
900	U27891	1327	405
1000	U27892	1474	450
1100	U27893	1621	495
1200	U27894	1769	540
1300	U27895	1916	585
1400	U27896	2064	630
1500	U27897	2211	675
1600	U27898	2358	720
1800	U27899	2653	810
2000	U27900	2948	900

LENGTH	HM CODE	Heat Output Watt	Heat Output Watt
		(75-65-20)	(45-35-20)
TYPE 11	600mm Height Single		
400	U28174	360	113
500	U28176	540	169
800	U28178	720	225
1000	U28180	900	282
1200	U28182	1,080	338
1400	U28184	1,260	395
1600	U28186	1,440	451
1800	U28187	1,620	507

LENGTH	HM CODE	Heat Output Watt	Heat Output Watt
		(75-65-20)	(45-35-20)
TYPE 22	600mm Height Double		
400	U28189	684	208
500	U28190	855	261
600	U28191	1,026	313
700	U28192	1,197	365
800	U28193	1,368	417
900	U28194	1,539	469
1000	U28195	1,710	521
1100	U28196	1,881	573
1200	U28197	2,052	625
1300	U28198	2,223	677
1400	U28199	2,394	730
1500	U28200	2,565	782
1600	U28201	2,736	834
1800	U28202	3,078	938
2000	U28203	3,420	1,042

LENGTH	HM CODE	Heat Output Watt	Heat Output Watt
		(75-65-20)	(45-35-20)
TYPE 22	300mm Height Double		
400	U28213	387	120
600	U28214	580	180
800	U28215	774	240
1000	U28216	967	300
1200	U28217	1,160	359
1400	U28218	1,354	419
1600	U28219	1,547	479
1800	U28220	1,741	539
2000	U28221	1,934	599

LENGTH	HM CODE	Heat Output Watt	Heat Output Watt
		(75-65-20)	(45-35-20)
TYPE 33	600mm Height Triple		
400	U28256	976	296
600	U28258	1464	443
800	U28260	1952	591
1000	U28262	2440	739
1200	U28264	2928	887
1400	U28266	3416	1035
1600	U28268	3904	1183
1800	U28269	4392	1330
2000	U28270	4880	1478