

H64WMT2

COMMERCIAL Tap Range

Thermostatic Wall Mount TMV3
HTM64 Mixer Tap



Features:

- Complies with HTM04-01
- Safe Touch surface temperature
- Integral flush system assists against infection
- Smooth internal waterways
- 1-step isolation and filter removal

Product Certifications:



WRAS Certificate No: 1604006
WRAS Expiry Date: 30/04/2021



TMV3 Certificate No: BC1652-1215
TMV3 Expiry Date: 16/12/2020




For more products, visit our website:
<http://www.bristan.com>



Specification

Product Type:	Commercial
Main Construction Material:	Brass
Mount Type:	Wall
Handle Type:	Lever
Connection Inlet:	15mm Compression with Eccentric Isolation
Connection Outlet:	Aerator and Open Outlet Options included
Number of Tap Holes:	2
Valve/Cartridge Type:	Thermostatic Sequential Cartridge
Plumbing System Requirements:	All, preferably balanced
Working Pressure Range:	Min 0.2 bar, Max 5 bar
Maximum Hot Water Temperature: °C	60
Maximum Static Pressure: (bar)	10
Flow Type:	Single
Isolation Included:	Yes
Pre-set Temperature °C:	41 °C

Dimensions (measurements in mm)

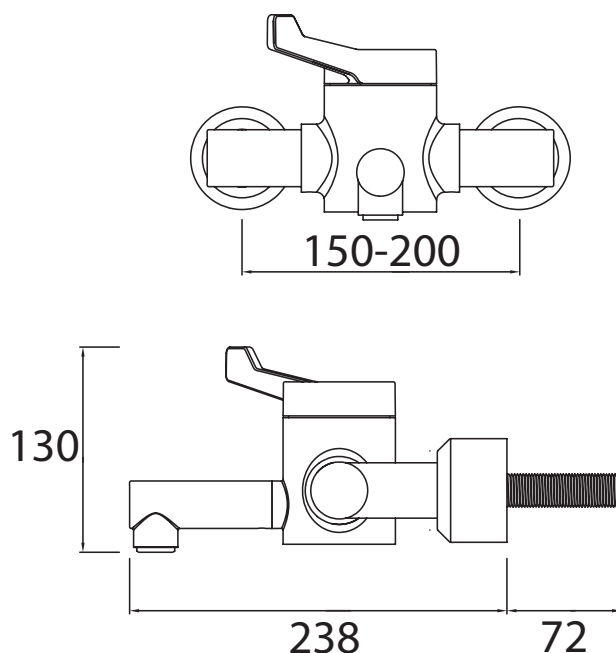

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
H64WMT2	1.5	2.6	3.9	5.1	5.7	5.7

TECHNICAL
DATA
SHEET



BRISTAN
TAPS & SHOWERS
D6