GLL RAPSNK3 C

GALLERY Tap Range Gallery Rapid Boiling 3-in-1 Sink Mixer Chrome



_	_	_	₽.			_	_	
F	e	а	ТΙ	u	r	e	S	
	_	9	9	9		_	_	

- Everything you need: tap, tails, tank, pressure reducing valve and filter included
- Safety: Handle requires button to be pushed before turning to dispense boiling water
- Safe to touch spout: Boiling water is stored in the tank not in the tap reducing the risk of scalding
- Quality: Hard wearing, flawless finish that lasts
- Perfect taste: Supplied in-line filter cartridge to minimise limescale and prolong the life of your tank, as well as absorbing chlorine and other chemicals to give you the perfect tasting tea or coffee

Product Certifications:




For more products, visit our website: http://www.bristan.com



Specification						
Product Type:	Kitchen Taps					
Main Construction Material:	Brass; ABS					
Mount Type:	Deck					
Handle Type:	1 Lever Handle, 1 Spring-back Handle					
Connection Inlet:	1/2" BSP Flexible Tails					
Number of Tap Holes:	1					
Tank Capacity:	2.4 litres					
Temperature Settings:	7 Settings; Min: 75°C Max: 98°C					
Plumbing System Requirements:	Suitable for high pressure systems only					
Working Pressure Range:	Min: 1.5 bar Max: 3 bar					
Maximum Hot Water Temperature: °C	65					
Maximum Static Pressure: (bar)	3					
Flow Type:	Dual					
Isolation Included:	No					
Power Rating:	1.4 - 1.5kW					
Electrical Supply Requirements:	230-240V AC, 50 Hz, IPX4 Protection					

Dimensions (measurements in mm)

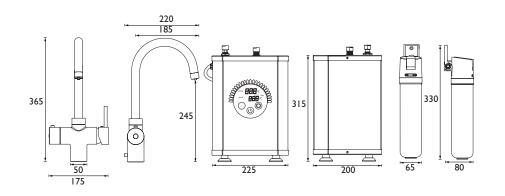

Flow Rates (I/min)							
System Pressure (bar)	1.5	2	3				
GLL RAPSNK3 C (Mixed)	6.8	7.8	9.6				
GLL RAPSNK3 C (Boiling Water)	2	2	2				

TECHNICAL DATA SHEET





