

MODULAR MANIFOLDS C520 C530 C320 SERIES



WITH METAL PLATES



WITH PLASTIC PLATES



WITH SNAP HANDLE



Application:

Modular manifolds are characterized by the possibility of being connected to each other.

They are used both in domestic systems and in heating. The manifolds are equipped with shut-off valves with simple knobs or identification plates for the various utility users.

All models are available with 2-3-4-5 outputs and main connections size G 3/4 "and G1". Connection assemblies of G 1/2 " - 24X19 - G 3/4" EK. Outlet centres: 35 and 40 mm.

Technical characteristics:

Technical features	Symbol	Values
Medium		Water / water with glycol
Max. glycol percentage	%	30%
Dimensions		3/4" or 1"
Connections		1/2", 24-19, 3/4"EK
Outlet centres	mm	35 and 40 mm
Max working pressure	PN	10 bar
Max working temperature	t max	110 °C

Element	Material
Manifold body	Brass EN12165-CW 617N-M
Rubber components to seal:	EPDM peroxide
Steel components	INOX AISI302
Plastic components:	ABS
Other brass components	Brass EN12165-CW 617N-M

MODULAR MANIFOLDS C520 C520-35 SERIES

Models:



C522

Modular manifold 2 ways with shut-off valve, outlet centres 35 and 40 mm. They are characterized by knobs where it is possible to mount aluminum indicator plates of the various utilities.

DN	Size manifold	Interaxis mm	Connection for outlets	Weight kg	Kvs m ³ /h	Code yellow	Code nickel
20	3/4"	35	1/2"	0.340	2.54	C52200TBI35	C52200QBI35
20	3/4"	35	24-19	0.340	2.54	C52201TBI35	C52201QBI35
20	3/4"	40	1/2"	0.340	2.54	C522N00TV	C522N00QV
20	3/4"	40	24-19	0.340	2.54	C522N01TV	C522N01QV
20	3/4"	40	3/4" EK	0.340	2.54	C522N02TV	C522N02QV
25	1"	35	1/2"	0.325	2.54	C52210TBI35	C52210QBI35
25	1"	40	1/2"	0.325	2.95	C522N10TV	C522N10QV
25	1"	40	24-19	0.325	2.95	C522N11TV	C522N11QV
25	1"	40	3/4" EK	0.325	2.95	C522N12TV	C522N12QV

C523

Modular manifold 3 ways with shut-off valve, outlet centres 35 and 40 mm. They are characterized by knobs where it is possible to mount aluminum indicator plates of the various utilities.

DN	Size manifold	Interaxis mm	Connection for outlets	Weight kg	Kvs m ³ /h	Code yellow	Code nickel
20	3/4"	35	1/2"	0.480	2.54	C52300TBI35	C52300QBI35
20	3/4"	35	24-19	0.480	2.54	C52301TBI35	C52301QBI35
20	3/4"	40	1/2"	0.480	2.54	C523N00TV	C523N00QV
20	3/4"	40	24-19	0.480	2.54	C523N01TV	C523N01QV
20	3/4"	40	3/4" EK	0.480	2.54	C523N02TV	C523N02QV
25	1"	35	1/2"	0.465	2.95	C52310TBI35	C52310QBI35
25	1"	40	1/2"	0.465	2.95	C523N10TV	C523N10QV
25	1"	40	24-19	0.465	2.95	C523N11TV	C523N11QV
25	1"	40	3/4" EK	0.465	2.95	C523N12TV	C523N12QV

MODULAR MANIFOLDS

C520 C520-35 SERIES

Models:

C524

Modular manifold 4 ways with shut-off valve, outlet centres 35 and 40 mm. They are characterized by knobs where it is possible to mount aluminum indicator plates of the various utilities.

DN	Size manifold	Interaxis mm	Connection for outlets	Weight kg	Kvs m ³ /h	Code yellow	Code nickel
20	3/4"	35	1/2"	0.660	2.54	C52400TBI35	C52400QBI35
20	3/4"	35	24-19	0.660	2.54	C52401TBI35	C52401QBI35
20	3/4"	40	1/2"	0.660	2.54	C524N00TV	C524N00QV
20	3/4"	40	24-19	0.660	2.54	C524N01TV	C524N01QV
20	3/4"	40	3/4" EK	0.660	2.54	C524N02TV	C524N02QV
25	1"	35	1/2"	0.645	2.95	C52410TBI35	C52410QBI35
25	1"	40	1/2"	0.645	2.95	C524N10TV	C524N10QV
25	1"	40	24-19	0.645	2.95	C524N11TV	C524N11QV
25	1"	40	3/4" EK	0.645	2.95	C524N12TV	C524N12QV


C525

Modular manifold 5 ways with shut-off valve, outlet centres 35 and 40 mm. They are characterized by knobs where it is possible to mount aluminum indicator plates of the various utilities.

DN	Size manifold	Interaxis mm	Connection for outlets	Weight kg	Kvs m ³ /h	Code yellow	Code nickel
20	3/4"	35	1/2"	0.820	2.54	C52500TBI35	C52500QBI35
20	3/4"	35	24-19	0.820	2.54	C52501TBI35	C52501QBI35
20	3/4"	40	1/2"	0.820	2.54	C525N00TV	C525N00QV
20	3/4"	40	24-19	0.820	2.54	C525N01TV	C525N01QV
20	3/4"	40	3/4" EK	0.820	2.54	C525N02TV	C525N02QV
25	1"	35	1/2"	0.800	2.95	C52510TBI35	C52510QBI35
25	1"	40	1/2"	0.800	2.95	C525N10TV	C525N10QV
25	1"	40	24-19	0.800	2.95	C525N11TV	C525N11QV
25	1"	40	3/4" EK	0.800	2.95	C525N12TV	C525N12QV

MODULAR MANIFOLDS C530 C530-35 SERIES

Models:

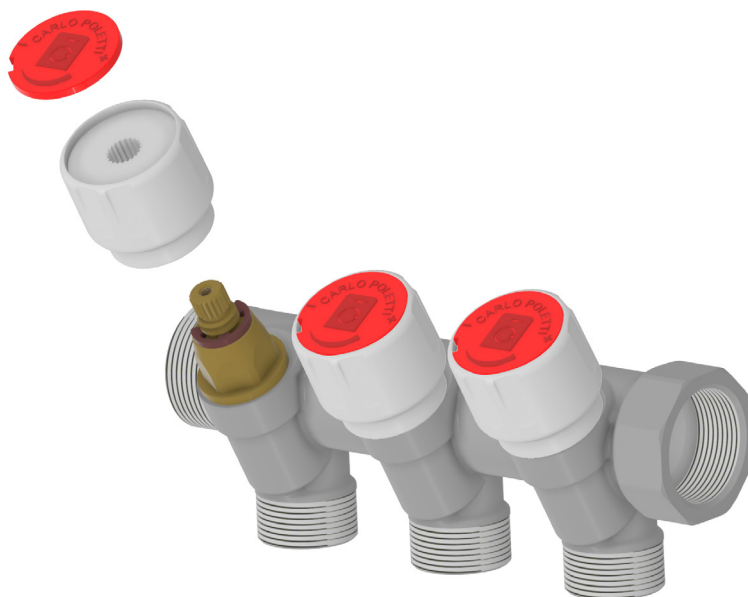

C532

Modular manifold 2 ways with shut-off valve, outlet centres 35 and 40 mm. They are characterized by knobs where it is possible to mount plastic indicator plates of the various utilities.

DN	Size manifold	Interaxis mm	Connection for outlets	Weight kg	Kvs m³/h	Code yellow	Code nickel
20	3/4"	35	1/2"	0.340	2.54	C53200TBI35	C53200QBI35
20	3/4"	35	24-19	0.340	2.54	C53201TBI35	C53201QBI35
20	3/4"	40	1/2"	0.340	2.54	C522N00TV	C522N00QV
20	3/4"	40	24-19	0.340	2.54	C522N01TV	C522N01QV
20	3/4"	40	3/4" EK	0.340	2.54	C522N02TV	C522N02QV
25	1"	35	1/2"	0.325	2.95	C53210TBI35	C53210QBI35
25	1"	40	1/2"	0.325	2.95	C522N10TV	C522N10QV
25	1"	40	24-19	0.325	2.95	C522N11TV	C522N11QV
25	1"	40	3/4" EK	0.325	2.95	C522N12TV	C522N12QV

C533

Modular manifold 3 ways with shut-off valve, outlet centres 35 and 40 mm. They are characterized by knobs where it is possible to mount plastic indicator plates of the various utilities.

DN	Size manifold	Interaxis mm	Connection for outlets	Weight kg	Kvs m³/h	Code yellow	Code nickel
20	3/4"	35	1/2"	0.480	2.54	C53300TBI35	C53300QBI35
20	3/4"	35	24-19	0.480	2.54	C53301TBI35	C53301QBI35
20	3/4"	40	1/2"	0.480	2.54	C523N00TV	C523N00QV
20	3/4"	40	24-19	0.480	2.54	C523N01TV	C523N01QV
20	3/4"	40	3/4" EK	0.480	2.54	C523N02TV	C523N02QV
25	1"	35	1/2"	0.465	2.95	C53310TBI35	C53310QBI35
25	1"	40	1/2"	0.465	2.95	C523N10TV	C523N10QV
25	1"	40	24-19	0.465	2.95	C523N11TV	C523N11QV
25	1"	40	3/4" EK	0.465	2.95	C523N12TV	C523N12QV

MODULAR MANIFOLDS

C530 C530-35 SERIES

Models:

C534

Modular manifold 4 ways with shut-off valve, outlet centres 35 and 40 mm. They are characterized by knobs where it is possible to mount plastic indicator plates of the various utilities.

DN	Size	Interaxis	Connection	Weight	Kvs	Code	Code
	manifold	mm	for outlets	kg	m ³ /h	yellow	nickel
20	3/4"	35	1/2"	0.660	2.54	C53400TBI35	C53400QBI35
20	3/4"	35	24-19	0.660	2.54	C53401TBI35	C53401QBI35
20	3/4"	40	1/2"	0.660	2.54	C524N00TV	C524N00QV
20	3/4"	40	24-19	0.660	2.54	C524N01TV	C524N01QV
20	3/4"	40	3/4" EK	0.660	2.54	C524N02TV	C524N02QV
25	1"	35	1/2"	0.645	2.95	C53410TBI35	C53410QBI35
25	1"	40	1/2"	0.645	2.95	C524N10TV	C524N10QV
25	1"	40	24-19	0.645	2.95	C524N11TV	C524N11QV
25	1"	40	3/4" EK	0.645	2.95	C524N12TV	C524N12QV


C535

Modular manifold 5 ways with shut-off valve, outlet centres 35 and 40 mm. They are characterized by knobs where it is possible to mount plastic indicator plates of the various utilities.

DN	Size	Interaxis	Connection	Weight	Kvs	Code	Code
	manifold	mm	for outlets	kg	m ³ /h	yellow	nickel
20	3/4"	35	1/2"	0.820	2.54	C53500TBI35	C53500QBI35
20	3/4"	35	24-19	0.820	2.54	C53501TBI35	C53501QBI35
20	3/4"	40	1/2"	0.820	2.54	C525N00TV	C525N00QV
20	3/4"	40	24-19	0.820	2.54	C525N01TV	C525N01QV
20	3/4"	40	3/4" EK	0.820	2.54	C525N02TV	C525N02QV
25	1"	35	1/2"	0.800	2.95	C53510TBI35	C53510QBI35
25	1"	40	1/2"	0.800	2.95	C525N10TV	C525N10QV
25	1"	40	24-19	0.800	2.95	C525N11TV	C525N11QV
25	1"	40	3/4" EK	0.800	2.95	C525N12TV	C525N12QV

MODULAR MANIFOLDS C320 C320-35 SERIES

Models:

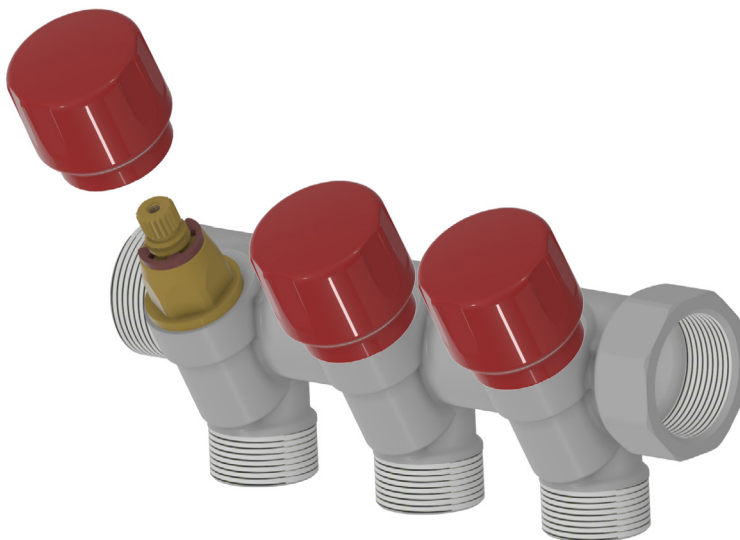

C322

Modular manifold 2 ways with shut-off valve, outlet centres 35 and 40 mm. Snap handwheel.

DN	Size manifold	Interaxis mm	Connection for outlets	Weight kg	Kvs m ³ /h	Code yellow	Code nickel
20	3/4"	35	1/2"	0.340	2.54	C32200T35	C32200Q35
20	3/4"	35	24-19	0.340	2.54	C32201T35	C32201Q35
20	3/4"	40	1/2"	0.340	2.54	C322N00TB	C32200QB
20	3/4"	40	24-19	0.340	2.54	C322N01TB	C32201QB
20	3/4"	40	3/4" EK	0.340	2.54	C322N02TB	C32202QB
25	1"	35	1/2"	0.325	2.95	C32210T35	C32210Q35
25	1"	40	1/2"	0.325	2.95	C322N10TB	C322N10QB
25	1"	40	24-19	0.325	2.95	C322N11TB	C322N11QB
25	1"	40	3/4" EK	0.325	2.95	C322N12TB	C322N12QB

C323

Modular manifold 3 ways with shut-off valve, outlet centres 35 and 40 mm. Snap handwheel.

DN	Size manifold	Interaxis mm	Connection for outlets	Weight kg	Kvs m ³ /h	Code yellow	Code nickel
20	3/4"	35	1/2"	0.480	2.54	C32300T35	C32300Q35
20	3/4"	35	24-19	0.480	2.54	C32301T35	C32301Q35
20	3/4"	40	1/2"	0.480	2.54	C323N00TB	C323N00QB
20	3/4"	40	24-19	0.480	2.54	C323N01TB	C323N01QB
20	3/4"	40	3/4" EK	0.480	2.54	C323N02TB	C323N02QB
25	1"	35	1/2"	0.465	2.95	C32310T35	C32310Q35
25	1"	40	1/2"	0.465	2.95	C323N10TB	C323N10QB
25	1"	40	24-19	0.465	2.95	C323N11TB	C323N11QB
25	1"	40	3/4" EK	0.465	2.95	C323N12TB	C323N12QB



MODULAR MANIFOLDS C320 C320-35 SERIES

Models:

C324

Modular manifold 4 ways with shut-off valve, outlet centres 35 and 40 mm. Snap handwheel.

DN	Size	Interaxis	Connection	Weight	Kvs	Code	Code
	manifold	mm	for outlets	kg	m ³ /h	yellow	nickel
20	3/4"	35	1/2"	0.660	2.54	C32400T35	C32400Q35
20	3/4"	35	24-19	0.660	2.54	C32401T35	C32401Q35
20	3/4"	40	1/2"	0.660	2.54	C324N00TB	C324N00QB
20	3/4"	40	24-19	0.660	2.54	C324N01TB	C324N01QB
20	3/4"	40	3/4" EK	0.660	2.54	C324N02TB	C324N02QB
25	1"	35	1/2"	0.645	2.95	C32410T35	C32410Q35
25	1"	40	1/2"	0.645	2.95	C324N10TB	C324N10QB
25	1"	40	24-19	0.645	2.95	C324N11TB	C324N11QB
25	1"	40	3/4" EK	0.645	2.95	C324N12TB	C324N12QB



C325

Modular manifold 5 ways with shut-off valve, outlet centres 35 and 40 mm. Snap handwheel.

DN	Size	Interaxis	Connection	Weight	Kvs	Code	Code
	manifold	mm	for outlets	kg	m ³ /h	yellow	nickel
20	3/4"	35	1/2"	0.820	2.54	C32500T35	C32500Q35
20	3/4"	35	24-19	0.820	2.54	C32501T35	C32501Q35
20	3/4"	40	1/2"	0.820	2.54	C325N00TB	C325N00QB
20	3/4"	40	24-19	0.820	2.54	C325N01TB	C325N01QB
20	3/4"	40	3/4" EK	0.820	2.54	C325N02TB	C325N02QB
25	1"	35	1/2"	0.800	2.95	C32510T35	C32510Q35
25	1"	40	1/2"	0.800	2.95	C325N10TB	C325N10QB
25	1"	40	24-19	0.800	2.95	C325N11TB	C325N11QB
25	1"	40	3/4" EK	0.800	2.95	C325N12TB	C325N12QB

MODULAR MANIFOLDS

Sizes:

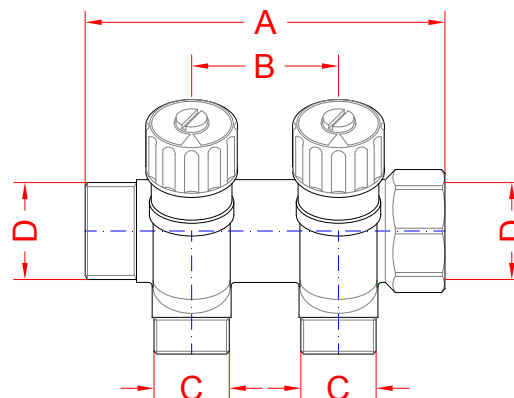

C520 and C530 series

Modular manifold with shut off valves, outlet centres 35 and 40 mm.

! Attention: For main connections manifolds, both male and female, the use of hemp or PTFE seal and the use of additional sealants is forbidden. The removal of the O-ring is forbidden.

DN	D	Nº ways	A mm	B mm	C mm	E mm	F mm	G mm
20	3/4"	2 ways	98	35	1/2"-24x19	34	35	40
20	3/4"	3 ways	138	35	1/2"-24x19	34	35	40
20	3/4"	4 ways	178	35	1/2"-24x19	34	35	40
20	3/4"	5 ways	216	35	1/2"-24x19	34	35	40
20	3/4"	2 ways	98	40	1/2"-24x19-3/4"EK	34	35	40
20	3/4"	3 ways	138	40	1/2"-24x19-3/4"EK	34	35	40
20	3/4"	4 ways	178	40	1/2"-24x19-3/4"EK	34	35	40
20	3/4"	5 ways	216	40	1/2"-24x19-3/4"EK	34	35	40
25	1"	2 ways	96	35	1/2"	35	38	43
25	1"	3 ways	136	35	1/2"	35	38	43
25	1"	4 ways	176	35	1/2"	35	38	43
25	1"	5 ways	216	35	1/2"	35	38	43
25	1"	2 ways	96	40	1/2"-24x19-3/4"EK	35	38	43
25	1"	3 ways	136	40	1/2"-24x19-3/4"EK	35	38	43
25	1"	4 ways	176	40	1/2"-24x19-3/4"EK	35	38	43
25	1"	5 ways	216	40	1/2"-24x19-3/4"EK	35	38	43

MODULAR MANIFOLDS

Sizes:


! Attention: For main connections manifolds, both male and female, the use of hemp or PTFE seal and the use of additional sealants is forbidden. The removal of the O-ring is forbidden.

C322 series

Modular manifold with shut off valves, outlet centres 35 and 40 mm.

DN	D	Nº	A	B	C	E	F	G
			mm	mm	mm	mm	mm	mm
20	3/4"	2 vie	98	35	1/2"-24x19	35	35	40
20	3/4"	3 vie	138	35	1/2"-24x19	35	35	40
20	3/4"	4 vie	178	35	1/2"-24x19	35	35	40
20	3/4"	5 vie	216	35	1/2"-24x19	35	35	40
20	3/4"	2 vie	98	40	1/2"-1/2" flat seat	33.5	35	40
20	3/4"	2 vie	98	40	24x19-3/4" EK	35	35	40
20	3/4"	3 vie	138	40	1/2"-1/2" flat seat	33.5	35	40
20	3/4"	3 vie	138	40	24x19-3/4" EK	35	35	40
20	3/4"	4 vie	178	40	1/2"-1/2" flat seat	33.5	35	40
20	3/4"	4 vie	178	40	24x19-3/4" EK	35	35	40
20	3/4"	5 vie	216	40	1/2"-1/2" flat seat	33.5	35	40
20	3/4"	5 vie	216	40	24x19-3/4" EK	35	35	40
25	1"	2 vie	96	35	1/2"	35	38	43
25	1"	3 vie	136	35	1/2"	35	38	43
25	1"	4 vie	176	35	1/2"	35	38	43
25	1"	5 vie	216	35	1/2"	35	38	43
25	1"	2 vie	96	40	1/2"-24x19-3/4" EK	35	38	43
25	1"	3 vie	136	40	1/2"-24x19-3/4" EK	35	38	43
25	1"	4 vie	176	40	1/2"-24x19-3/4" EK	35	38	43
25	1"	5 vie	216	40	1/2"-24x19-3/4" EK	35	38	43

Connections:

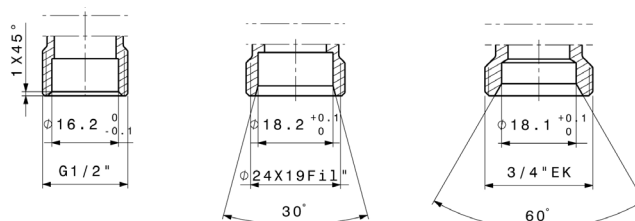

MODULAR MANIFOLDS

Boxes:

A312

Modular plastic box for manifolds with brackets, compact dimensions for transport.


Size			Weight	Code
L	H	W	kg	
332	272	86	1.04	A31203A
412	272	86	1.33	A31200A
512	272	86	1.45	A31201A
612	272	86	1.60	A31204A

A324

Plastic box for manifolds with brackets, fix size.

Size			Weight	Code
L	H	W	kg	
332	272	86	0.96	A32400A
412	272	86	1.12	A32401A
512	272	86	1.50	A32403A
612	272	86	1.70	A32404A

The manifolds can be installed with fixing in the box, available in different sizes.

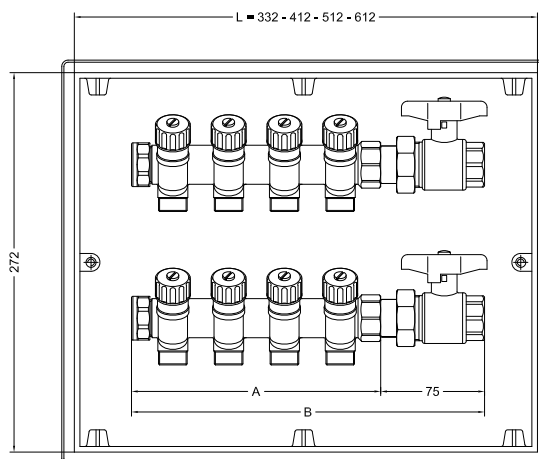

N° Derivazioni N° Outlets	A	B	Misura cassetta Box size	Cassetta serie Box art. code	Cassetta serie Box art. code
2	98	173	272x332x86	A31203A	A32400A
3	138	213	272x332x86	A31203A	A32400A
4	178	253	272x332x86	A31203A	A32400A
5	218	293	272x332x86	A31203A	A32400A
6	263	338	272x412x86	A31200A	A32401A
7	300	375	272x412x86	A31200A	A32401A
8	345	420	272x512x86	A31201A	A32403A
9	390	465	272x512x86	A31201A	A32403A
10	430	505	272x612x86	A31204A	A32404A
11	470	545	272x612x86	A31204A	A32404A
12	510	585	272x612x86	A31204A	A32404A



MODULAR MANIFOLDS

Adapters:


Type of pipe	Model	Max. pressure	Size	Connection	Code
COPPER	A307	10 bar	10	1/2"	A30707Q
			12	1/2"	A30708Q
			14	1/2"	A30709Q
			15	1/2"	A30710Q
	A306	10 bar	10	24-19	A30601Q
			12	24-19	A30602Q
			14	24-19	A30603Q
			15	24-19	A30604Q
			16	24-19	A30605Q
			18	24-19	A30606Q
	A331QEK	10 bar	10	3/4" EK	A33106QEK
			12	3/4" EK	A33107QEK
			14	3/4" EK	A33108QEK
			15	3/4" EK	A33109QEK
			16	3/4" EK	A33110QEK
			18	3/4" EK	A33111QEK
COPPER "UNIFIT"	A330	10 bar	10	1/2"	A33001Q
			12	1/2"	A33002Q
			14	1/2"	A33003Q
			15	1/2"	A33004Q
			16	1/2"	A33005Q
	A432	10 bar	10	24-19	A43201Q
			12	24-19	A43202Q
			14	24-19	A43203Q
			15	24-19	A43204Q
			16	24-19	A43205Q
	A433	10 bar	10	3/4" EK	A43301Q
			12	3/4" EK	A43302Q
			14	3/4" EK	A43303Q
			15	3/4" EK	A43304Q
			16	3/4" EK	A43305Q
			18	3/4" EK	A43306Q



MODULAR MANIFOLDS

Adapters:

Type of pipe	Model	Max. pressure	Size	Connection	Code
  MULTILAYER	A311	10 bar	14x2	1/2"	A31101Q
			16x2	1/2"	A31102Q
			16x2.25	1/2"	A31103Q
			16.2x2.6	1/2"	A31104Q
	A392	10 bar	14x2	24-19	A39201Q
			16x2	24-19	A39202Q
			16x2.25	24-19	A39203Q
			16.2x2.6	24-19	A39213Q
			17x2	24-19	A39204Q
			18x2	24-19	A39206Q
			20x2.25	24-19	A39209Q
			20x2.5	24-19	A39207Q
			20x2	24-19	A39208Q
	A393	10 bar	14x2	3/4" EK	A39301Q
			16x2	3/4" EK	A39302Q
			16x2.25	3/4" EK	A39303Q
			16.2x2.6	3/4" EK	A39315Q
			17x2	3/4" EK	A39304Q
			18x2	3/4" EK	A39306Q
			20x2	3/4" EK	A39308Q
			20x2.25	3/4" EK	A39309Q
			20x2.5	3/4" EK	A39307Q
			20x2.9	3/4" EK	A39316Q
			20x3	3/4" EK	A39351Q

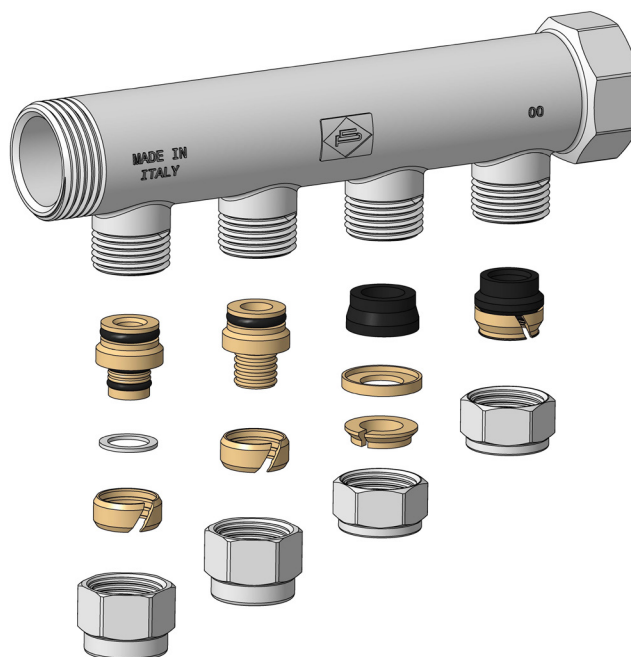


MODULAR MANIFOLDS

Adapters:

Type of pipe	Model	Max. pressure	Size	Connection	Code
  PLASTIC	A309	10 bar	12x1.1	1/2"	A30915Q
			12x2	1/2"	A30901Q
			14x2	1/2"	A30904Q
			15x2.5	1/2"	A30905Q
			16x1.5	1/2"	A30913Q
			16x2	1/2"	A30911Q
			16x2.2	1/2"	A30910Q
	A391	10 bar	12x2	24-19	A39101Q
			14x2	24-19	A39102Q
			15x2.5	24-19	A39104Q
			16x1.5	24-19	A39105Q
			16x2	24-19	A39106Q
			16x2.2	24-19	A39107Q
			17x2	24-19	A39108Q
			18x2	24-19	A39110Q
			18x2.5	24-19	A39111Q
			20x2	24-19	A39113Q
			20x2.5	24-19	A39114Q
			20x2.8	24-19	A39112Q
	A394	10 bar	12x1	3/4" EK	A39420Q
			12x2	3/4" EK	A39401Q
			14x2	3/4" EK	A39402Q
			15x2.5	3/4" EK	A39404Q
			16x1.5	3/4" EK	A39405Q
			16x2	3/4" EK	A39406Q
			16x2.2	3/4" EK	A39407Q
			17x2	3/4" EK	A39408Q
			18x2	3/4" EK	A39410Q
			18x2.5	3/4" EK	A39411Q
			20x2	3/4" EK	A39413Q
			20x2.5	3/4" EK	A39415Q

Note: To install the adapters, use the normal hexagon key for the 1/2 "connection and the A320 wrench for 24-19 and 3/4" connections with the torque torque specified in the adapter data sheet used.



Connections:

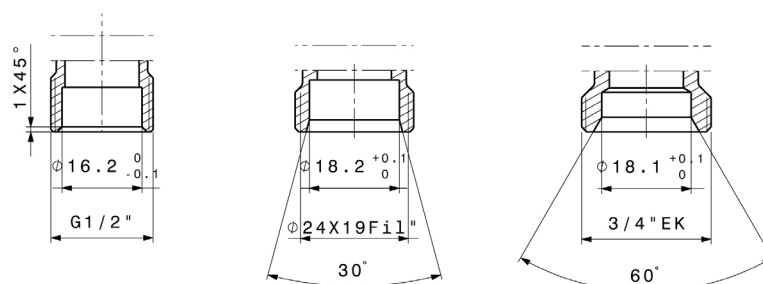



MODULAR MANIFOLDS

Accessories and spare parts:

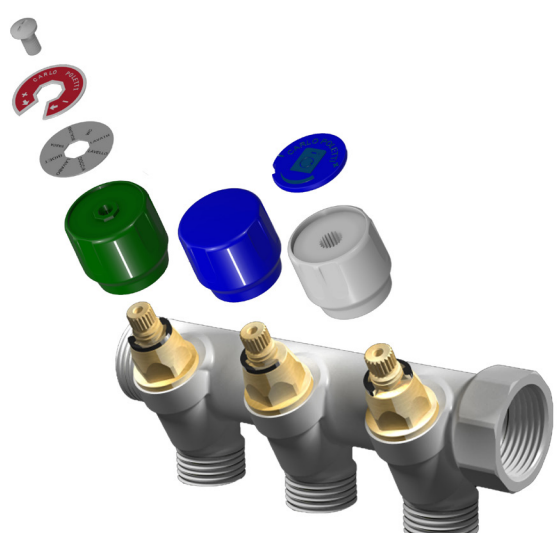	Model	Descriptions	Size	Note	Code
	A321	Headwork for manifolds.	3/8"	Per collettori 1"	A32107T
			3/8"	Per collettori 3/4"	A32108T
	A32906	Kit handle with metal plates for manifolds.		verde	A32906AV
				bianco	A32906ABI
	A32907	Kit handle with plastic plates for manifolds.		verde	A32907AV
				bianco	A32907ABI
	A345	Kit utility plates for handle A32907.		blu	A34504AB
				rosso	A34504AR
	NC322	Screw for handwheel A32906.	3/16"		NC32203Q
	A32908	Handle for manifolds with regulating valves.		blu	A32908B
				rossa	A32908R
	A322	Key for adapters.	1/2"	-	A33410Q
			3/4"	-	A33201Q
			1"	-	A33202Q
			1 1/4"	-	A33203Q
					




MODULAR MANIFOLDS C520 C530 C320 SERIES

Hydraulic characteristics:

**C520
C530
C320**
Manifold
DN20 3/4"

Size	Kv m ³ /h
3/4"	2.54

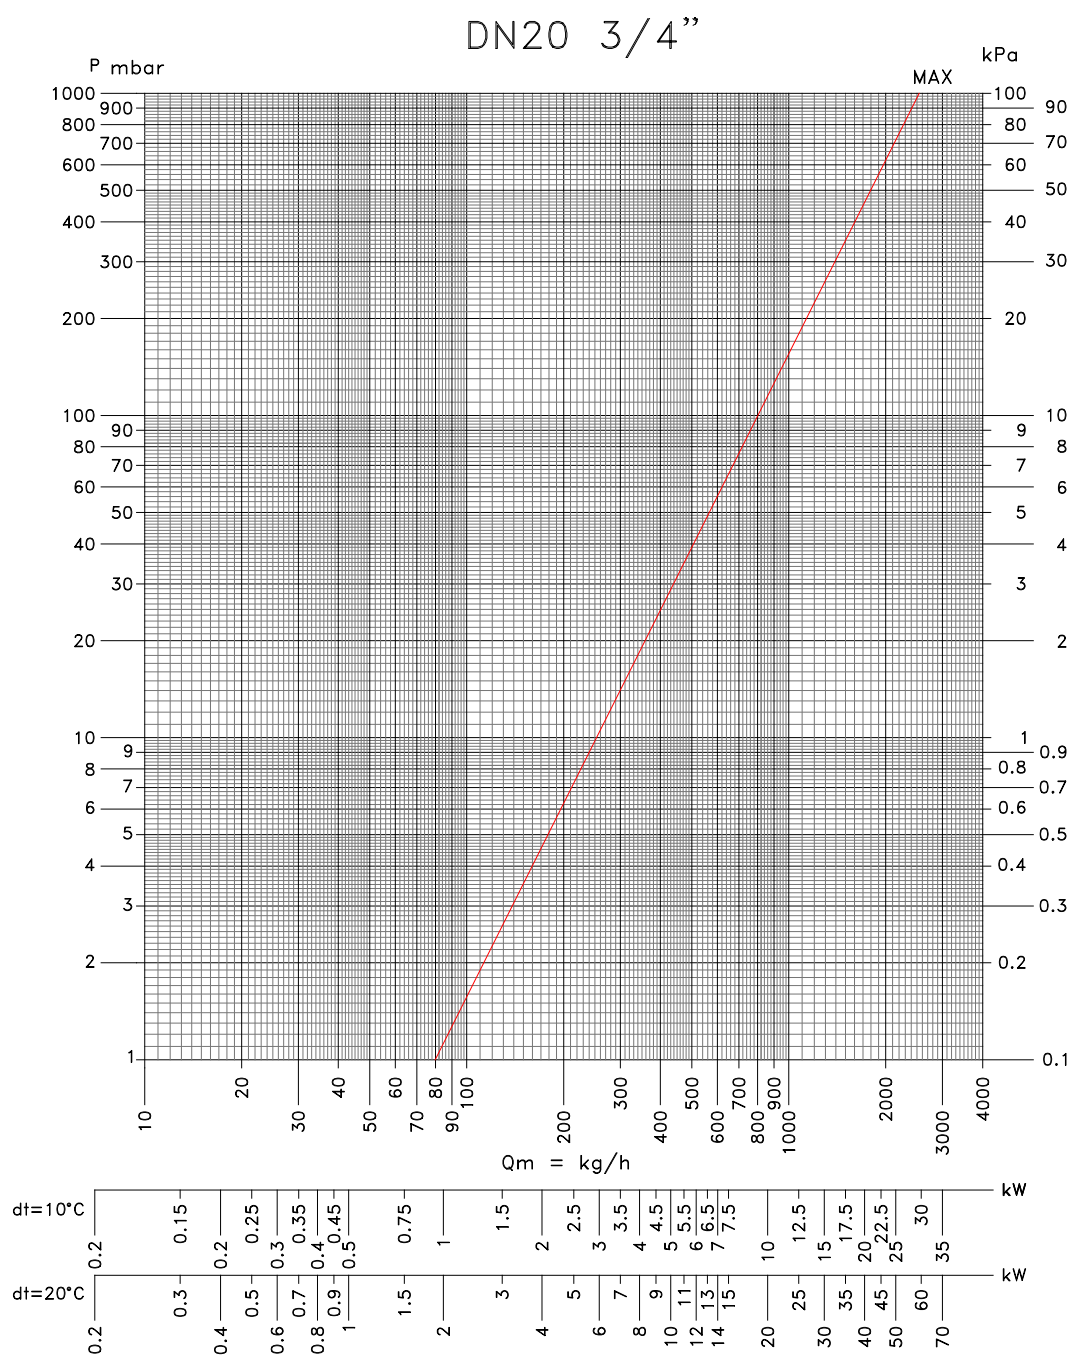




MODULAR MANIFOLDS C520 C530 C320 SERIES

Hydraulic characteristics:

**C520
C530
C320**
Manifold
DN25 1"

Size	Kv m ³ /h
1"	2.95

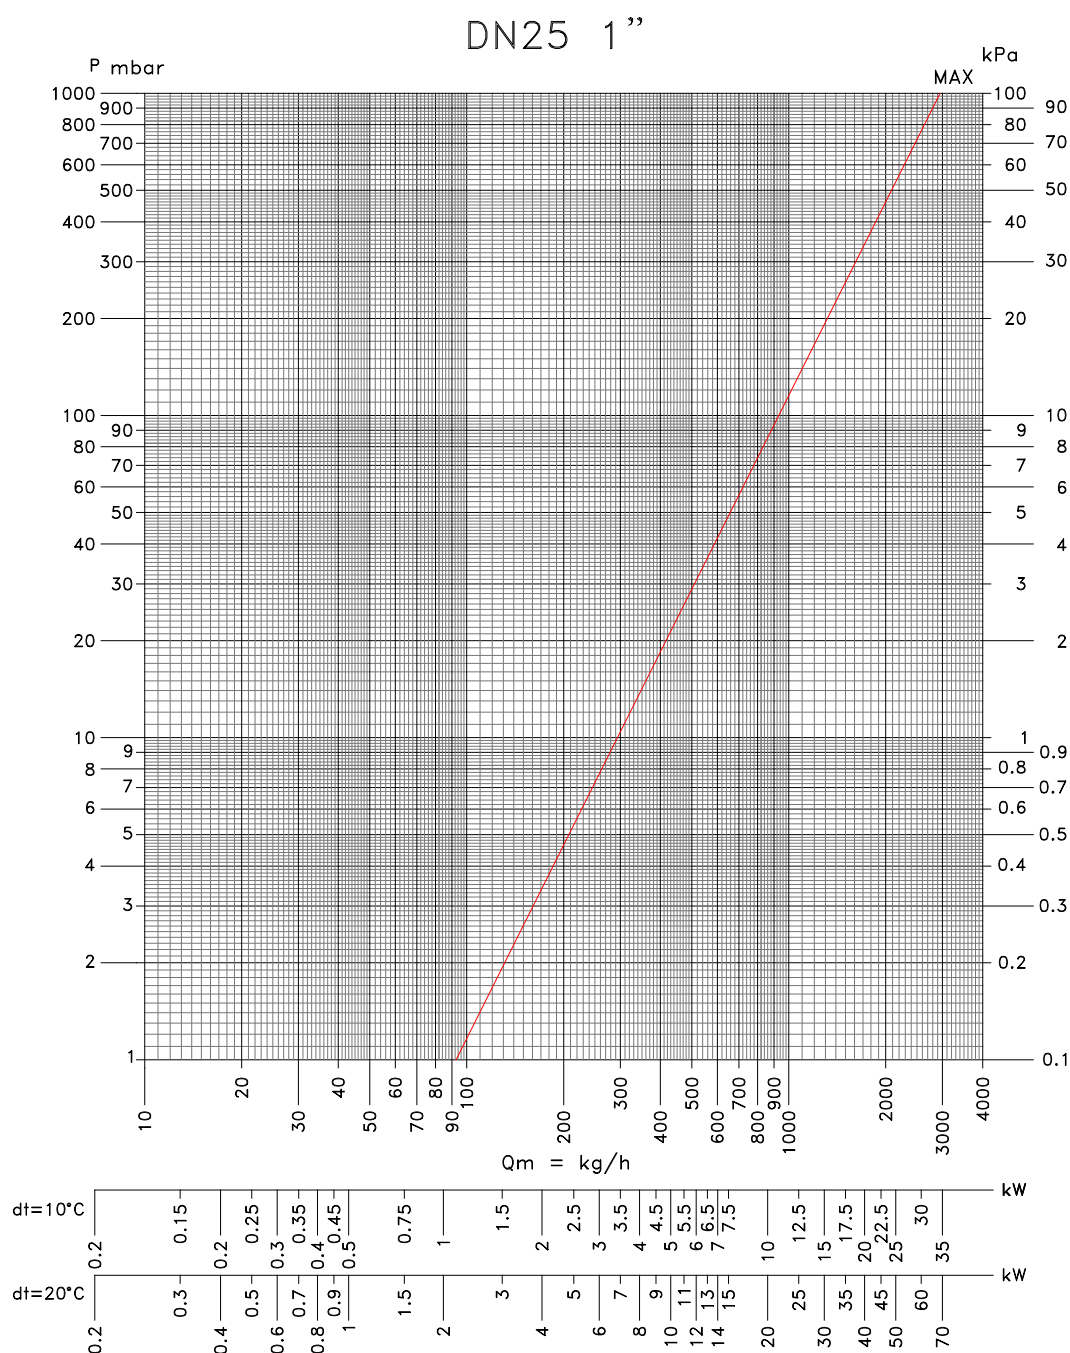

SPECIFICATION SUMMARIES

C522 MODEL

Modular manifold with regulating valves. Green ABS handle with double face metal plate (red or blue), 2-ways, outlet centres 40 mm. Manifold body made of nickel-plated brass or yellow brass CW617N. Side connection of manifold G 3/4" or G 1". Connections for circuits are 1/2", 24-19 or 3/4" EK compliant with ISO 228/1. Maximum working pressure 10 bar. Maximum temperature of liquid 110 °C.

C523 MODEL

Modular manifold with regulating valves. Green ABS handle with double face metal plate (red or blue), 3-ways, outlet centres 40 mm. Manifold body made of nickel-plated brass or yellow brass CW617N. Side connection of manifold G 3/4" or G 1". Connections for circuits are 1/2", 24-19 or 3/4" EK compliant with ISO 228/1. Maximum working pressure 10 bar. Maximum temperature of liquid 110 °C.

C524 MODEL

Modular manifold with regulating valves. Green ABS handle with double face metal plate (red or blue), 4-ways, outlet centres 40 mm. Manifold body made of nickel-plated brass or yellow brass CW617N. Side connection of manifold G 3/4" or G 1". Connections for circuits are 1/2", 24-19 or 3/4" EK compliant with ISO 228/1. Maximum working pressure 10 bar. Maximum temperature of liquid 110 °C.

C525 MODEL

Modular manifold with regulating valves. Green ABS handle with double face metal plate (red or blue), 5-ways, outlet centres 40 mm. Manifold body made of nickel-plated brass or yellow brass CW617N. Side connection of manifold G 3/4" or G 1". Connections for circuits are 1/2", 24-19 or 3/4" EK compliant with ISO 228/1. Maximum working pressure 10 bar. Maximum temperature of liquid 110 °C.

C532 MODEL

Modular manifold with regulating valves. Green ABS handle with plastic plate (red or blue), 2-ways, outlet centres 40 mm. Manifold body made of nickel-plated brass or yellow brass CW617N. Side connection of manifold G 3/4" or G 1". Connections for circuits are 1/2", 24-19 or 3/4" EK compliant with ISO 228/1. Maximum working pressure 10 bar. Maximum temperature of liquid 110 °C.

C533 MODEL

Modular manifold with regulating valves. Green ABS handle with plastic plate (red or blue), 3-ways, outlet centres 40 mm. Manifold body made of nickel-plated brass or yellow brass CW617N. Side connection of manifold G 3/4" or G 1". Connections for circuits are 1/2", 24-19 or 3/4" EK compliant with ISO 228/1. Maximum working pressure 10 bar. Maximum temperature of liquid 110 °C.

C534 MODEL

Modular manifold with regulating valves. Green ABS handle with plastic plate (red or blue), 4-ways, outlet centres 40 mm. Manifold body made of nickel-plated brass or yellow brass CW617N. Side connection of manifold G 3/4" or G 1". Connections for circuits are 1/2", 24-19 or 3/4" EK compliant with ISO 228/1. Maximum working pressure 10 bar. Maximum temperature of liquid 110 °C.

SPECIFICATION SUMMARIES

C535 MODEL

Modular manifold with regulating valves. Green ABS handle with plastic plate (red or blue), 5-ways, outlet centres 40 mm. Manifold body made of nickel-plated brass or yellow brass CW617N. Side connection of manifold G 3/4" or G 1". Connections for circuits are 1/2", 24-19 or 3/4" EK compliant with ISO 228/1. Maximum working pressure 10 bar. Maximum temperature of liquid 110 °C.

C322 MODEL

Modular manifold with regulating valves. Red or blue ABS handle, 2-ways, outlet centres 40 mm. Manifold body made of nickel-plated brass or yellow brass CW617N. Side connection of manifold G 3/4" or G 1". Connections for circuits are 1/2", 24-19 or 3/4" EK compliant with ISO 228/1. Maximum working pressure 10 bar. Maximum temperature of liquid 110 °C.

C323 MODEL

Modular manifold with regulating valves. Red or blue ABS handle, 3-ways, outlet centres 40 mm. Manifold body made of nickel-plated brass or yellow brass CW617N. Side connection of manifold G 3/4" or G 1". Connections for circuits are 1/2", 24-19 or 3/4" EK compliant with ISO 228/1. Maximum working pressure 10 bar. Maximum temperature of liquid 110 °C.

C324 MODEL

Modular manifold with regulating valves. Red or blue ABS handle, 4-ways, outlet centres 40 mm. Manifold body made of nickel-plated brass or yellow brass CW617N. Side connection of manifold G 3/4" or G 1". Connections for circuits are 1/2", 24-19 or 3/4" EK compliant with ISO 228/1. Maximum working pressure 10 bar. Maximum temperature of liquid 110 °C.

C325 MODEL

Modular manifold with regulating valves. Red or blue ABS handle, 5-ways, outlet centres 40 mm. Manifold body made of nickel-plated brass or yellow brass CW617N. Side connection of manifold G 3/4" or G 1". Connections for circuits are 1/2", 24-19 or 3/4" EK compliant with ISO 228/1. Maximum working pressure 10 bar. Maximum temperature of liquid 110 °C.

SPECIFICATION SUMMARIES

MODELLO C522 -35

Collettore componibile con valvola di intercettazione. Manopola in ABS verde con placchetta metallica bifacciale rosso/blu, 2 vie, interasse 35 mm. Corpo di collettore in ottone nichelato/giallo CW617N. Otturatore in ottone con O-Ring EPDM. Misure di attacchi principali di collettore G 3/4" MF e G 1" MF. Attacchi per circuiti sono 1/2", 24-19 e 3/4"EK conforme ISO 228/1. Massima pressione di esercizio 10 bar. Temperatura massima di liquido 110 °C.

MODELLO C523-35

Collettore componibile con valvola di regolazione. Manopola in ABS verde con placchetta metallica bifacciale rosso/blu, 3 vie, interasse 35 mm. Corpo di collettore in ottone nichelato/giallo CW617N. Otturatore in ottone con O-Ring EPDM. Misure di attacchi principali di collettore G 3/4" MF e G 1" MF. Attacchi per circuiti sono 1/2", 24-19 e 3/4"EK conforme ISO 228/1. Massima pressione di esercizio 10 bar. Temperatura massima di liquido 110 °C.

MODELLO C524-35

Collettore componibile con valvola di regolazione. Manopola in ABS verde con placchetta metallica bifacciale rosso/blu, 4 vie, interasse 35 mm. Corpo di collettore in ottone nichelato/giallo CW617N. Otturatore in ottone con O-Ring EPDM. Misure di attacchi principali di collettore G 3/4" MF e G 1" MF. Attacchi per circuiti sono 1/2", 24-19 e 3/4"EK conforme ISO 228/1. Massima pressione di esercizio 10 bar. Temperatura massima di liquido 110 °C.

MODELLO C525-35

Collettore componibile con valvola di regolazione. Manopola in ABS verde con placchetta metallica bifacciale rosso/blu, 5 vie, interasse 35 mm. Corpo di collettore in ottone nichelato/giallo CW617N. Otturatore in ottone con O-Ring EPDM. Misure di attacchi principali di collettore G 3/4" MF e G 1" MF. Attacchi per circuiti sono 1/2", 24-19 e 3/4"EK conforme ISO 228/1. Massima pressione di esercizio 10 bar. Temperatura massima di liquido 110 °C.

MODELLO C532-35

Collettore componibile con valvola di regolazione. Manopola in ABS verde con placchetta in plastica rosso/blu, 2 vie, interasse 35 mm. Corpo di collettore in ottone nichelato/giallo CW617N. Otturatore in ottone con O-Ring EPDM. Misure di attacchi principali di collettore G 3/4" MF e G 1" MF. Attacchi per circuiti sono 1/2", 24-19, 3/4"EK e 1/2" sede piano conforme ISO 228/1. Massima pressione di esercizio 10 bar. Temperatura massima di liquido 110 °C.

MODELLO C533-35

Collettore componibile con valvola di regolazione. Manopola in ABS verde con placchetta in plastica rosso/blu, 3 vie, interasse 35 mm. Corpo di collettore in ottone nichelato/giallo CW617N. Otturatore in ottone con O-Ring EPDM. Misure di attacchi principali di collettore G 3/4" MF e G 1" MF. Attacchi per circuiti sono 1/2", 24-19, 3/4"EK e 1/2" sede piano conforme ISO 228/1. Massima pressione di esercizio 10 bar. Temperatura massima di liquido 110 °C.

MODELLO C534-35

Collettore componibile con valvola di regolazione. Manopola in ABS verde con placchetta in plastica rosso/blu, 4 vie, interasse 35 mm. Corpo di collettore in ottone nichelato/giallo CW617N. Otturatore in ottone con O-Ring EPDM. Misure di attacchi principali di collettore G 3/4" MF e G 1" MF. Attacchi per circuiti sono 1/2", 24-19, 3/4"EK e 1/2" sede piano conforme ISO 228/1. Massima pressione di esercizio 10 bar. Temperatura massima di liquido 110 °C.

SPECIFICATION SUMMARIES

C535-35 MODEL

Modular manifold with regulating valves. Green ABS handle with plastic plate (red or blue), 5-ways, outlet centres 35 mm. Manifold body made of nickel-plated brass or yellow brass CW617N. Side connection of manifold G 3/4" or G 1". Connections for circuits are 1/2", 24-19 or 3/4" EK compliant with ISO 228/1. Maximum working pressure 10 bar. Maximum temperature of liquid 110 °C.

C322-35 MODEL

Modular manifold with regulating valves. Red or blue ABS handle, 2-ways, outlet centres 35 mm. Manifold body made of nickel-plated brass or yellow brass CW617N. Side connection of manifold G 3/4" or G 1". Connections for circuits are 1/2", 24-19 or 3/4" EK compliant with ISO 228/1. Maximum working pressure 10 bar. Maximum temperature of liquid 110 °C.

C323-35 MODEL

Modular manifold with regulating valves. Red or blue ABS handle, 3-ways, outlet centres 35 mm. Manifold body made of nickel-plated brass or yellow brass CW617N. Side connection of manifold G 3/4" or G 1". Connections for circuits are 1/2", 24-19 or 3/4" EK compliant with ISO 228/1. Maximum working pressure 10 bar. Maximum temperature of liquid 110 °C.

C324-35 MODEL

Modular manifold with regulating valves. Red or blue ABS handle, 4-ways, outlet centres 35 mm. Manifold body made of nickel-plated brass or yellow brass CW617N. Side connection of manifold G 3/4" or G 1". Connections for circuits are 1/2", 24-19 or 3/4" EK compliant with ISO 228/1. Maximum working pressure 10 bar. Maximum temperature of liquid 110 °C.

C325-35 MODEL

Modular manifold with regulating valves. Red or blue ABS handle, 5-ways, outlet centres 35 mm. Manifold body made of nickel-plated brass or yellow brass CW617N. Side connection of manifold G 3/4" or G 1". Connections for circuits are 1/2", 24-19 or 3/4" EK compliant with ISO 228/1. Maximum working pressure 10 bar. Maximum temperature of liquid 110 °C.

**CARLO POLETTI**

HeatingComponents&Design

The company Carlo Poletti S.r.l. reserves the right to change the product line and related technical data at any time and without notification.

Carlo Poletti srl
Sede legale/Registered office:
Via Tancognino, 134
28024 Gozzano (NO) Italy
P.IVA/VAT: IT00127430031

Stabilimento e uffici/Production and offices:
Via Martiri delle Foibe, 15
28024 Gozzano (NO) Italy
Tel. +39 0322 94752 / 913699
Fax +39 0322 956577
info@poletti.it - www.poletti.it


QUALITY MADE IN ITALY