

HYDROPOWER Power Shower Range

HY POWSHX W

Hydropower Thermostatic
Power Shower White



Specification

Finish/Colour:	Matt Chrome/White
Main Construction Material:	ABS Plastic
No of Controls:	3
Shower Type:	Power Shower 1500
Shower Head Type:	Adjustable
Working Pressure Range: (bar)	Min. 0.1 Bar, Max 1.0 Bar
Maximum Static Pressure: (bar)	10
Plumbing System Suitability:	Low Pressure Gravity Systems Only
Connection Inlet:	15mm Push-Fit Inlet Connections
Connection Outlet:	G 1/2" BSP
Thermostatic:	Thermostatic
Maximum Hot Water Supply Temperature	60
Power Rating:	230v AC@50Hz/3Amp/150W
Motor Rating:	15 mins. (unit will need to cool down if thermal cut out trips)

Features:

- Eco button for deactivation of pump
- 15mm push-fit inlet connections
- Thermostatic cartridge keeps water temperature within +/- 1°C
- Push button start/stop with single temperature dial
- Includes hose, rub-clean anti-limescale handset and riser rail
- Better Handset 3/Function white

Product Certifications:

BEAB Certificate No: 20618
BEAB Expiry Date: 18/03/2021




Intertek



For more products, visit our website:
<http://www.bristan.com>



Dimensions (measurements in mm)

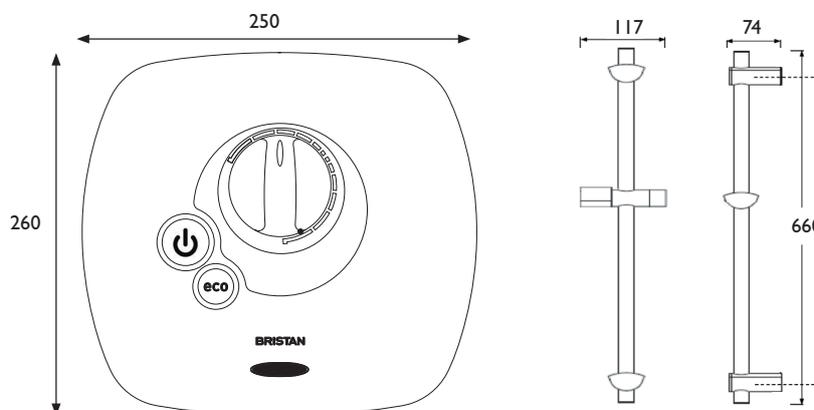

Flow Rates (l/min)

System Pressure (bar)	0.03	0.1	0.5
Through Handset (Both Rings)	7.9	8.2	9.3

TECHNICAL
DATA
SHEET



BRISTAN
TAPS & SHOWERS

D4