

Contour 21 Rimless Wall Mounted WC Pan Standard Projection - HTM64

ILLUSTRATED

- S3076** (WC H) Contour 21 rimless wall mounted WC pan with horizontal outlet
- S3617** Conceala 2 cistern 4.5 or 6 litre single flush syphon side supply and internal overflow plastic flushbend, long CP lever
- S4066** Contour 21 seat no cover, top fixing hinges and retaining buffers
- S9139** Support bracket for wall mounted WC raised height with bolts

OPTIONS

- S3643** Conceala 2 cistern 4.5/3 or 4/2.6 litre dual flush valve side supply and internal overflow, alternative height plastic flushbends, no flushplate
- S3640** Conceala 2 cistern 4.5 litre single flush valve side supply and internal overflow, alternative height plastic flushbends
- S3599** Sensorflow 21 WC flushing device, panel mounted sensor complete with concealed valve and 4 or 4.5 litre duct cistern
- S4504** Contemporary flush plate dual flush, Armitage Shanks logo, for Conceala 2 cisterns
- S4513** Palm push button Pneumatic, stainless steel for 31mm maximum thickness partition
- S4512** Finger push button pneumatic, stainless steel for 31mm maximum thickness partition
- S4305** Panekta outlet Connector, finned pattern to convert horizontal outlet WCs to P trap
- S4300** Panekta outlet Connector, finned pattern to convert horizontal outlet WCs to S or turned P trap

ILLUSTRATED PRODUCT DETAILS

Weights

S3076	20.41 KG
S3617	3.00 KG
S4066	1.55 KG
S9139	4.28 KG

Materials

S3076	Vitreous China
S3617	Plastic
S4066	Plastic
S9139	Metal

Finishes

S3076	<input type="checkbox"/>	White (01)
S3617	<input type="checkbox"/>	Neutral / No Finish (67)
S4066	<input type="checkbox"/>	White (01)
S9139	<input type="checkbox"/>	Neutral / No Finish (67)


Capacity

S3617	5 litres
--------------	----------

Designer

Robin Levien, RDI

FINISH OPTIONS

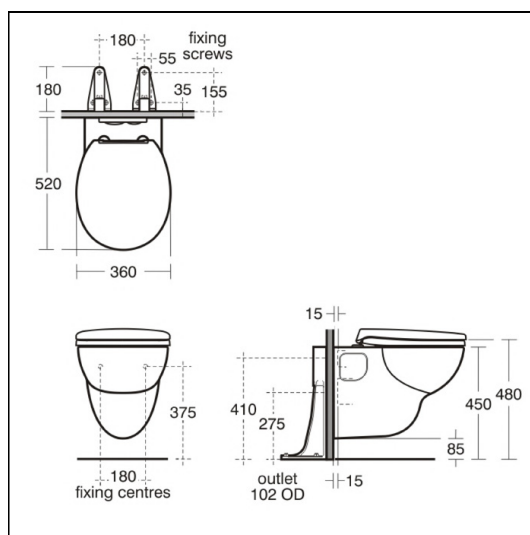

ACCREDITATIONS

S3643(67)



S3617(67)



S3640(67)



Contour 21 Rimless Wall Mounted WC Pan Standard Projection - HTM64



Standards

Vitreous china to BS 3402, BS EN 997 & BS EN 33

Special Notes

S9139 support brackets secured to floor within the duct, WC fixed to support brackets with bolts supplied. Joint sealed with waterproof sealant (not supplied). Currently not suitable for in-wall support systems.

FEATURES

