



Instantor®

NEW




Heavy Type - Full Bore

Description	Instantor® C x C Full Bore Copper Alloy Lever Action Ballvalve
Pipe Size Range	½", ¾", 1", 15mm, 22mm, 28mm - Red or Blue Handles Available
Max Operating Pressure	25 Bar
Max Operating Temperature	85°C A System Failure operating range of up to one hour at 95°C
Material Specification	EN12165 CW617N DW Brass - Chrome Plated, EDPM O-Rings & PTFE Seals
Standards & Certification	WRAS Cert No. 1904354 & 1906326 Kiwa Cert No. 1904751 Compression Ends to I.S.E.N. 1245-2:1998 Water Fittings Regulations 1999

CE CERT REFERENCE - Valves up to 1" and with a maximum allowable pressure greater than 0.5 Bar regarding liquids - fall under the sound engineering practices (SEP - Article 4, Section 3) and do not require CE Certification or Declaration of Conformity under the Pressure Equipment Directive (2014/68/EU)

Sanbra Fyffe is the only supplier of Irish Sized
WRAS Approved C x C Lever Ballvalves!

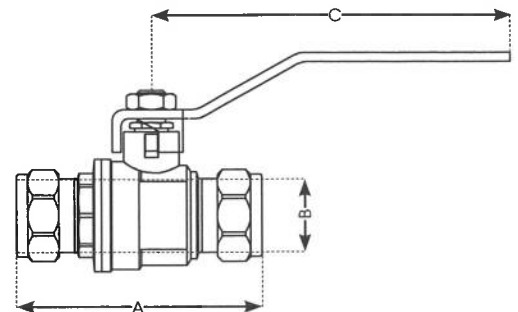

	A (mm)	B (mm)	C (mm)
½" / 15mm	70.5	14.7 / 15mm	88
¾" / 22mm	82	21 / 22mm	100
1" / 28mm	91	27.4 / 28mm	125

CODE	SIZE	PRICE €	CODE	SIZE	PRICE €
771788	½"	5.60	771719	15mm	5.60
771789	¾"	7.60	771720	22mm	7.60
771790	1"	13.00	771730	28mm	13.00

Please specify Red or Blue Handles when placing order (Use 'R' or 'B' after code above)

T 01 842 6255 E sales@instantor.ie www.instantor.ie

Sanbra Fyffe Ltd, Instantor Works, Santry Avenue, Santry, Dublin D09 K160