

Davant Mangers Tank and Cylinder Jackets



TECHNICAL INFORMATION - MANGERS RANGE OF BRITISH STANDARD HOT WATER CYLINDER JACKETS

- Jackets Kitemarked to, and manufactured in accordance with, British Standard Number BS 5615: 1985.
- Tested and approved at British Standards Institute (BSI Testing Hemel Hempstead) Licence No: KM36881.
- 80mm nominal thickness glass fibre infill kitemarked to BS 5803: Part 1: 1985 and non combustible to BS 476: Part 4: 1970.
- 100 micron flame retardant cover.
- Heavy duty fixings of tensile strength not less than 40N.
- Multi Panel (4) design to meet the heat loss requirements of BS 5615: 1985 (not more than 2.5KW per 24 hour standing heat loss).


MANGERS RANGE OF TRADE HOT WATER CYLINDER JACKETS

- 60mm and 80mm nominal thickness glass fibre infill available kitemarked to BS 5803: Part 1: 1985 and noncombustible to BS 476: Part 4: 1970.
- 100 micron flame retardant covering material.
- Supplied as a four segment wrap round jacket for cylindrical tanks.
- Heavy duty fixings of tensile strength not less than 40N.

A RANGE OF BRITISH STANDARD AND TRADE STANDARD HOT WATER CYLINDER AND COLD WATER TANK JACKETS

MANGERS HOT WATER CYLINDER JACKETS

- Ideal for insulation of hot water cylinders of all types.
- Eyelet incorporated with one top tie cord and four lengths of heavy duty fixing tape for ease of application.
- Available in British Standard (BS 5615: 1985) and Trade Standard grades.
- Both British standard & trade standards supplied in 4 panel format for ease of application.
- Suitable for all types of cylindrical hot water storage tanks.
- British Standard Grade approved by the Energy Action Grants Agency (EAGA) for use under the Energy Efficiency Commitment (EEC) scheme.
- Any special size of jacket available upon request.
- Every jacket supplied, complete with all fitting instructions.
- Made in United Kingdom.

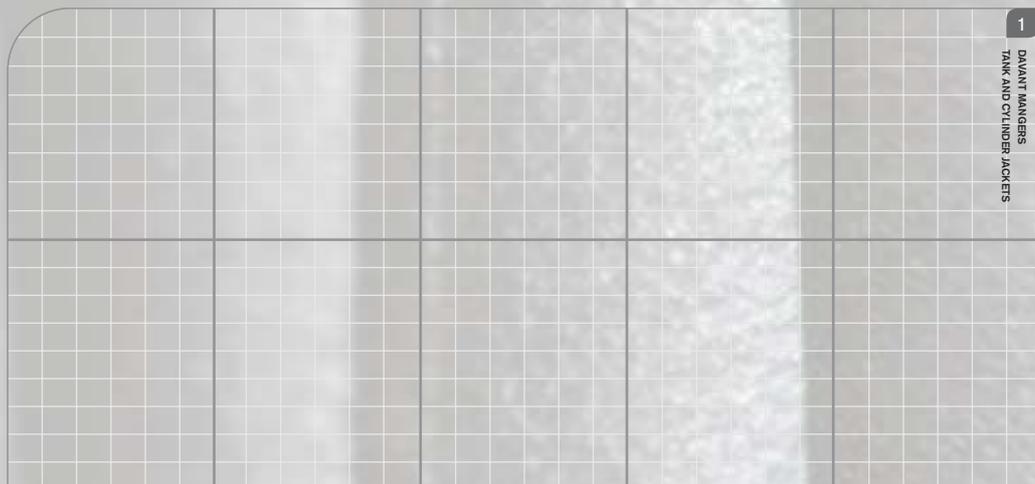

1
DAVANT MANGERS
TANK AND CYLINDER JACKETS

