

Specification

Fiche

Label

Product Specification



Product Code: TCIMVE-0300NFD
Item Description: 1535X560 DIRECT SOLAR (300L)

C



- Manufactured from high grade Duplex stainless steel
- Heated electrically with two factory fitted immersions
- Fitted with Branded Quality Components




Capacity	Brand	ERP Type	Item Category Code	Product Group Code	Model
300 L	CYCLONE	DirectUnvented	Stainless	CYCLONE	DIRECT SOL

Product Specification

Actual capacity (Ltr)	291	Thermal insulation	DENSE PU FOAM
Unit weight empty (kg)	53	Cylinder material	LDX 2101
Unit weight full (kg)	353	Outer casing	COATED MILD STEEL
No immersions	2	Foam thickness (mm)	0
Immersion spec kw 230v	3kW@230V	Dual stat label (C)	60
Max mains water pressure (Bar)	10	Safety temp (C)	95
Operating pressure t x0026 p (Bar)	7	Warranty terms (Year)	1Y
Tested to standard	BS EN 12897:2006	Heat loss (kWh_24h)	2.21

Dimensions

A - Height (mm)	1543
B - Diameter (mm)	560
C (mm)	212
D (mm)	262
E (mm)	432
F (mm)	532
G (mm)	597
H (mm)	947
I (mm)	1147
J (mm)	1327

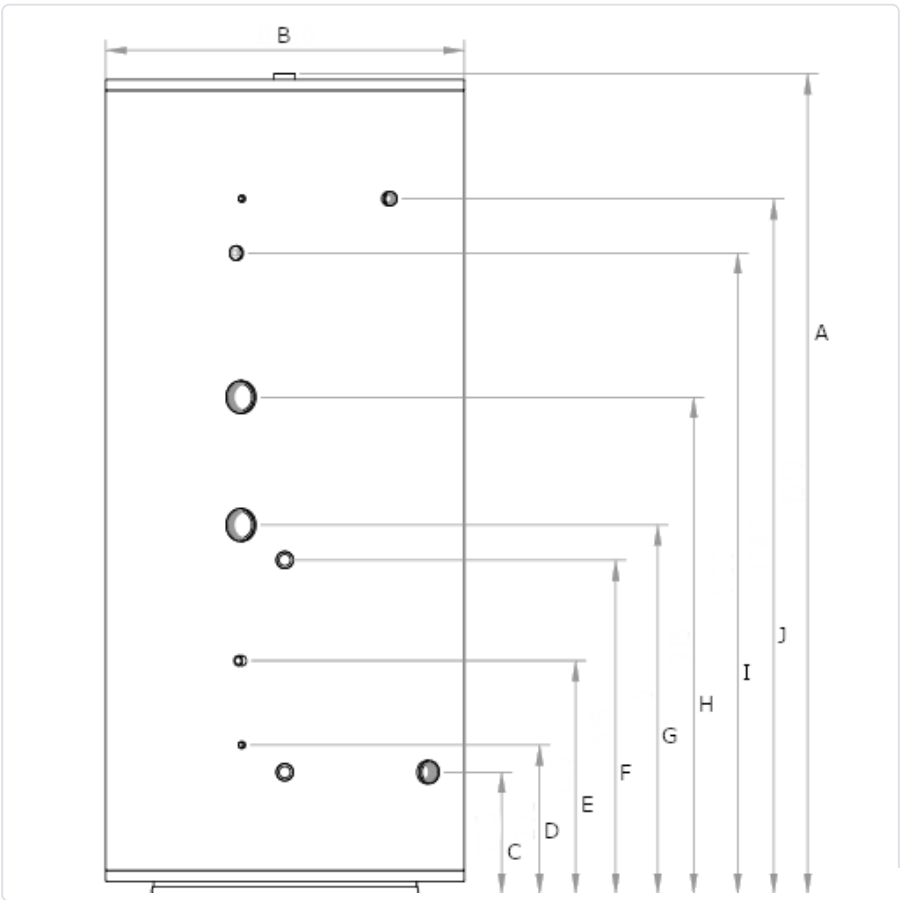

[Click or scan here to view the product page:](#)



<https://www.joule.ie/products/cyclone-direct-solar-ie/>



Test Standard: BS EN 12897:2006

Joule UK
4 Valencia Park, Gilcar Way,
Wakefield Europort
Castleford, West Yorkshire
WF105QS, UK

Joule Ireland
Unit 407 NW Business Park,
Cappagh Road,Ballycoolin,
Blanchardstown,
Dublin