

Specification

Fiche

Label

Product Specification



Product Code: TCIMVI-0200NFC
Item Description: 1085X560 INDIRECT (200L)

C



- Manufactured from high grade Duplex stainless steel
- Heated electrically with two factory fitted immersions
- Factory pre built Gas or Oil Boiler Ready




Capacity	Brand	ERP Type	Item Category Code	Product Group Code	Model
200 L	CYCLONE	IndirectUnvented	Stainless	CYCLONE	INDIRECT

Product Specification

Actual capacity (Ltr)	193	Thermal insulation	DENSE PU FOAM
Unit weight empty (kg)	40	Cylinder material	LDX 2101
Unit weight full (kg)	240	Outer casing	COATED MILD STEEL
No immersions	1	Coil material	316L STAINLESS STEEL
Immersion spec	3kW@230V	Foam thickness	0
Max mains water pressure (Bar)	10	Operating temp (C)	0
Operating pressure (Bar)	7	Safety valve temp (C)	95
Tested to standard	BS EN 12897:2006	Warranty terms (Year)	1Y
No heat exchangers	1	Heat loss	1.872
Coil 1 rating (kW)	18	Coil 1 surface area (m²)	.67
Coil 1 max prim pressure (Bar)	3.5	Coil 1 resistance (Bar)	.05

Dimensions

A - Height (mm)	1085
B - Diameter (mm)	560
C (mm)	212
D (mm)	352
E (mm)	532
F (mm)	597
G (mm)	762
H (mm)	877

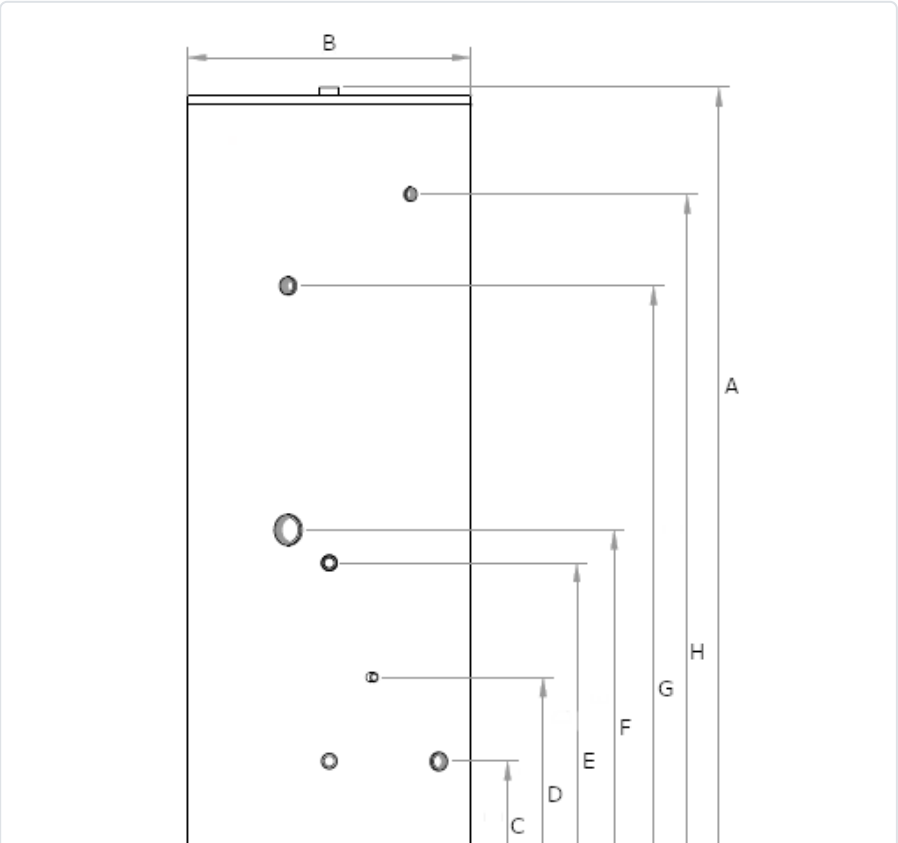

Discussion



4 Valencia Park, Gilcar Way, Unit 407 NW Business Park,

Wakefield Europort Castleford, West Yorkshire WF105QS, UK	Cappagh Road, Ballycoolin, Blanchardstown, Dublin
---	---

Unit 407 NW Business Park,

Cappagh Road,Ballycoolin,
Blanchardstown,
Dublin