

serie **FIDO-SFER**

Art. **6273**



Valvola a sfera per gas a passaggio totale, filettatura F/F, con leva in acciaio gialla.



Full bore ball valve for gas, F/F threaded, with yellow steel handle.





Robinet à boisseau sphérique à passage total pour gaz, F/F, avec poignée en acier jaune.



Kugelhahn mit vollem Durchgang für Gas, beiderseits Innengewinde mit gelbem Stahlhebel.



Válvula esfera por gas, paso total, roscas hembra/hembra, con palanca de hierro amarilla.

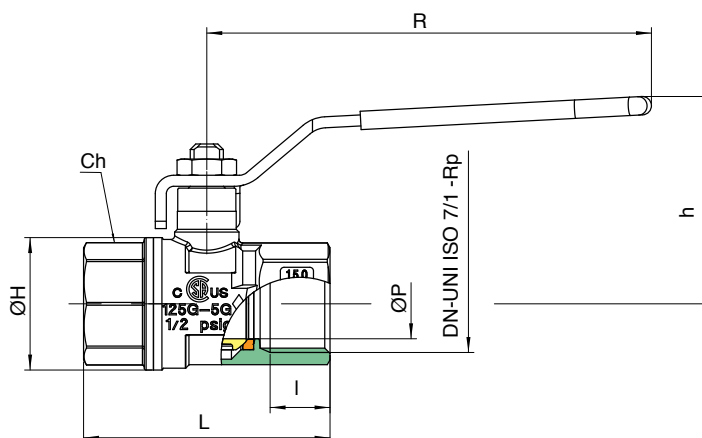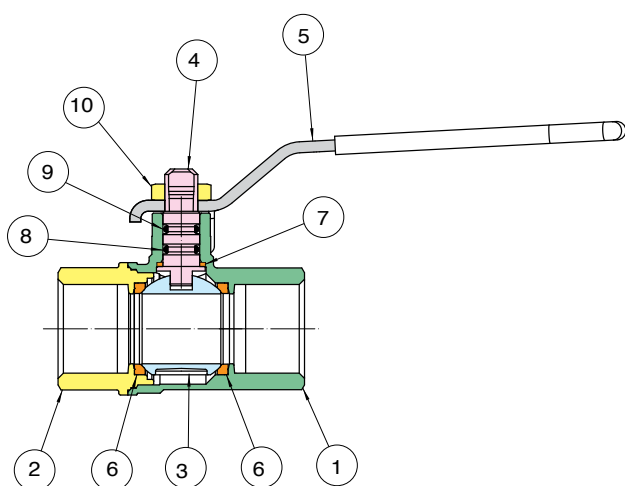

POS.	DENOMINAZIONE	PART NAME	DESCRIPTION	TEILBENENNUNG	DENOMINACION	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	CORPO	BODY	CORPS	GEHÄUSE	CUERPO	OTTONE CW617N UNI EN 12165	1
2	MANICOTTO	END CONNECTION	MANCHON	MUFFE	MANGUITO	OTTONE CW617N UNI EN 12165	1
3	SFERA	BALL	BILLE	KUGEL	ESFERA	OTTONE CW617N UNI EN 12165	1
4	ASTA	STEM	TIGE	SPINDEL	EJE	OTTONE CW614N UNI EN 12164	1
5	LEVA	HANDLE	PIOGNÉE	HANDHENEL	PALANCA	ACCIAIO DD11	1
6	GUARNIZIONE SFERA	BALL SEAT	JOINT DE TENUE BILLE	KUGELDICHTUNG	JUNTA ESFERA	P.T.F.E	2
7	GUARNIZIONE ANTIATTRITO	STEM SEAL/THRUST WASHER	JOINT DE L'AXE/ANTIFRICTION	ASIENTO EJE / ANTIFRICCIÓN	JUNTA EJE/ANTIFRICCIÓN	P.T.F.E	1
9	O-RING	O-RING	O-RING	O-RING	O-RING	NBR	1
9	O-RING	O-RING	O-RING	O-RING	O-RING	FKM	1
10	DADO	NUT	ECROU	MUTTER	TUERCA	ACCIAIO CL 04	1

MISURA SIZE	DN	BOX	MASTER BOX	CODICE CODE	I	L	ØH	Ch	R	h	MOP	Kg
1/4"	8	25	50	5980020000	11	51,5	23	20	95	47,5	5	0,14
3/8"	10	25	50	5980030000	11,4	51,5	23	20	95	47,5	5	0,12
1/2"	15	50	100	6273040000	15	59	30	25	96	46	5	0,18
3/4"	20	25	50	6273050000	16,3	67	36	31	121	57	5	0,30
1"	25	20	40	6273060000	19,1	81,5	43,5	38	121	59	5	0,44
1 1/4"	32	10	20	6273070000	21,4	94	53	48	151	73	5	0,77
1 1/2"	40	6	12	6273080000	21,4	102,5	65	54	151	79	5	1,03
2"	50	4	8	6273100000	25,7	123	80	67	160	93,5	5	1,76
2 1/2"	65	2	4	5980120000	30,2	152	111	90	205	129	5	3,71
3"	80	-	4	5980140000	33,3	177	136	105	205	140	5	5,85
4"	100	-	2	5980180000	39,3	214	166	130	260	160	5	10,20

Limiti di temperatura: -20°C +60°C - Temperature range: -20°C +60°C.

* Art. 5980